



REPORT NUMBER: MPL01633

PAGE: 1 OF 15

ISSUE DATE: 10/27/15

CATALOG NUMBER: L228L_2MXF_AFECA_25

LUMINAIRE: 228NB welded fin fixture assembly consisting of: (228) LEDs arranged in (4) quadrants of (57) LEDs (1.1" smooth acrylic lens and 1.75" molded visor metalized on the inside surfaces) in a 8-12-14-14-16-16-16-18-18-16-16-14-14-12-8 array, wired in series, enclosed with AR coated clear flat glass.

LAMP: Cree XM-L2 Light Emitting Diode (LED); Flux bin: EZWIB (ave. 315 lms); Color kit: EZWIB (ave. 5700K); 65 Typical CRI


(SEE PAGE 2 FOR MORE INFORMATION)

FLOODLIGHT CHARACTERISTICS

IES TYPE	2H X 3V			
MAXIMUM CANDLEPOWER	2069930.	AT	0.0 H,	0.0 V
HORIZONTAL BEAM ANGLE (50%)	11.2 deg			
VERTICAL BEAM ANGLE (50%)	10.3 deg			
HORIZONTAL FIELD ANGLE (10%)	25.4 deg			
VERTICAL FIELD ANGLE (10%)	29.6 deg			
BEAM LUMENS (% FIXTURE)	38978. (29.4 %)			
FIELD LUMENS (% FIXTURE)	104278. (78.7 %)			
TOTAL LUMENS (% FIXTURE)	132519. (100.0 %)			

AXIAL CANDLEPOWER

DEG	HORIZ.	DEG	VERT.	DEG	VERT.
90.0	0.	90.0	0.	-13.0	551300.
85.0	0.	85.0	0.	-14.0	514010.
75.0	0.	75.0	1.	-15.0	456980.
65.0	0.	65.0	12.	-16.0	391040.
55.0	0.	55.0	41.	-17.0	327850.
47.5	0.	47.5	126.	-18.0	275820.
42.5	240.	42.5	218.	-19.0	235280.
37.5	2380.	37.5	377.	-20.0	213324.
33.0	5710.	33.0	585.	-22.5	162100.
29.0	6640.	29.0	794.	-25.5	105740.
25.5	9230.	25.5	1107.	-29.0	47943.
22.5	14820.	22.5	1664.	-33.0	20349.
19.5	29240.	20.0	2950.	-37.5	9864.
17.0	52580.	19.0	4710.	-42.5	3084.
15.0	86620.	18.0	7490.	-47.5	777.
13.0	161630.	17.0	10300.	-55.0	223.
11.0	286660.	16.0	11760.	-65.0	65.
9.0	467860.	15.0	12570.	-75.0	18.
7.0	751790.	14.0	14570.	-85.0	0.
5.0	1159470.	13.0	20610.	-90.0	0.
3.0	1647260.	12.0	37830.		
1.0	2011360.	11.0	72940.		
0.0	2069930.	10.0	137150.		
-1.0	2011360.	9.0	235120.		
-3.0	1647260.	8.0	368640.		
-5.0	1159470.	7.0	535950.		
-7.0	751790.	6.0	739940.		
-9.0	467860.	5.0	984880.		
-11.0	286660.	4.0	1284660.		
-13.0	161630.	3.0	1604180.		
-15.0	86620.	2.0	1881290.		
-17.0	52580.	1.0	2020210.		
-19.5	29240.	0.0	2069930.		
-22.5	14820.	-1.0	1972690.		
-25.5	9230.	-2.0	1777470.		
-29.0	6640.	-3.0	1546420.		
-33.0	5710.	-4.0	1322680.		
-37.5	2380.	-5.0	1126000.		
-42.5	240.	-6.0	949050.		
-47.5	0.	-7.0	805750.		
-55.0	0.	-8.0	710690.		
-65.0	0.	-9.0	654390.		
-75.0	0.	-10.0	620030.		
-85.0	0.	-11.0	597360.		
-90.0	0.	-12.0	576890.		

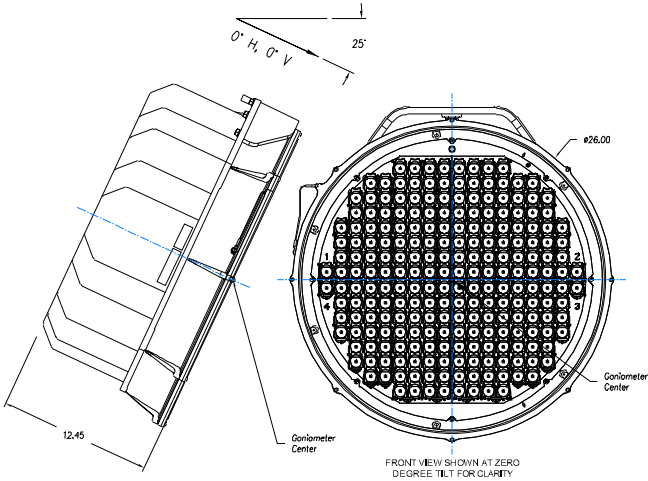

Tested ByRian Leedom.....
ApprovedKurt Dunkin.....

This technical data is the confidential property of Musco Sports-Lighting, LLC. Any reproduction or use of this information in whole or part for anything other than its limited, intended purpose for this project, without the written permission of Musco, is prohibited.

ALL CANDELA AND LUMEN VALUES IN THIS REPORT ARE BASED ON ABSOLUTE PHOTOMETRY.